AUTEC POWER SYSTEMS

Tel: 805-522-0888 • Fax: 805-522-8777

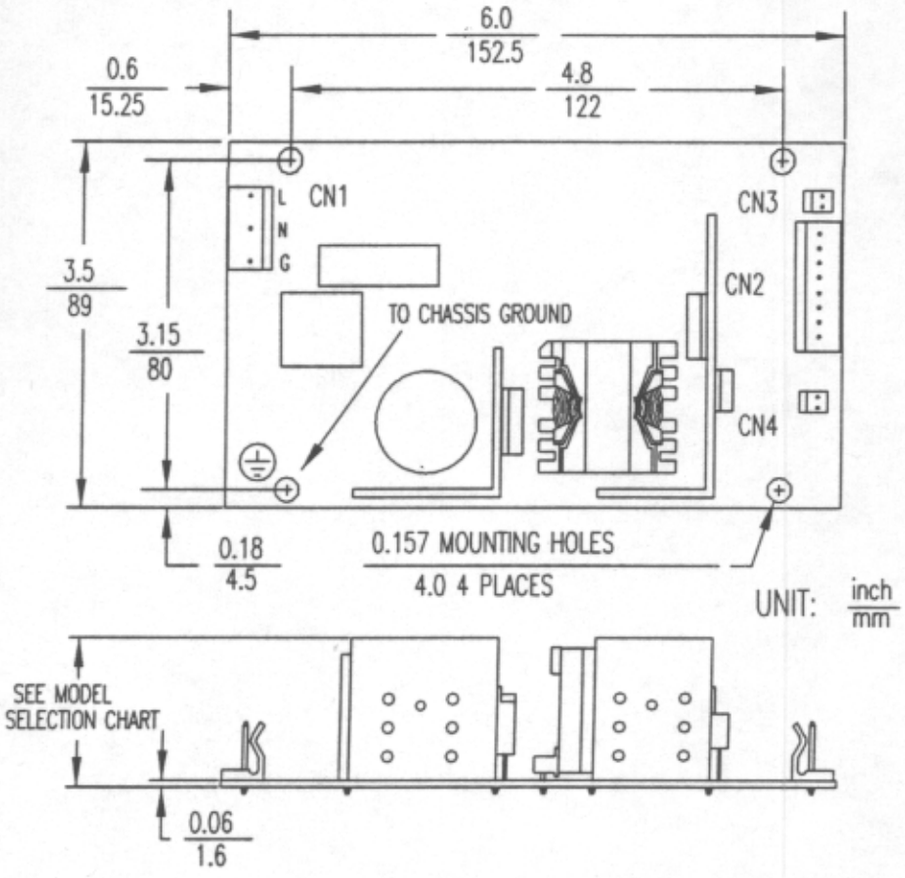

CN1	Molex: 09-65-20 Mate: Molex 09-50-10		
PIN			
1	2	3	4
GND	N/C	NEUT	N/C

CN2	Molex: Mate: Molex
MODEL	
UPS65-1004, -1004-X	
UPS65-1002, 1002-M, UPS85-1002	
SINGLE OUTPUT MODELS (-1xx1)	

CN3, CN4: Connections for F available (depend

For All Connectors: PIN 1 defined as f (opposite side fro

FUSING: 2A/250V Slow Blo

UPS65-1002-M & UPS85-1002 have 6 pi

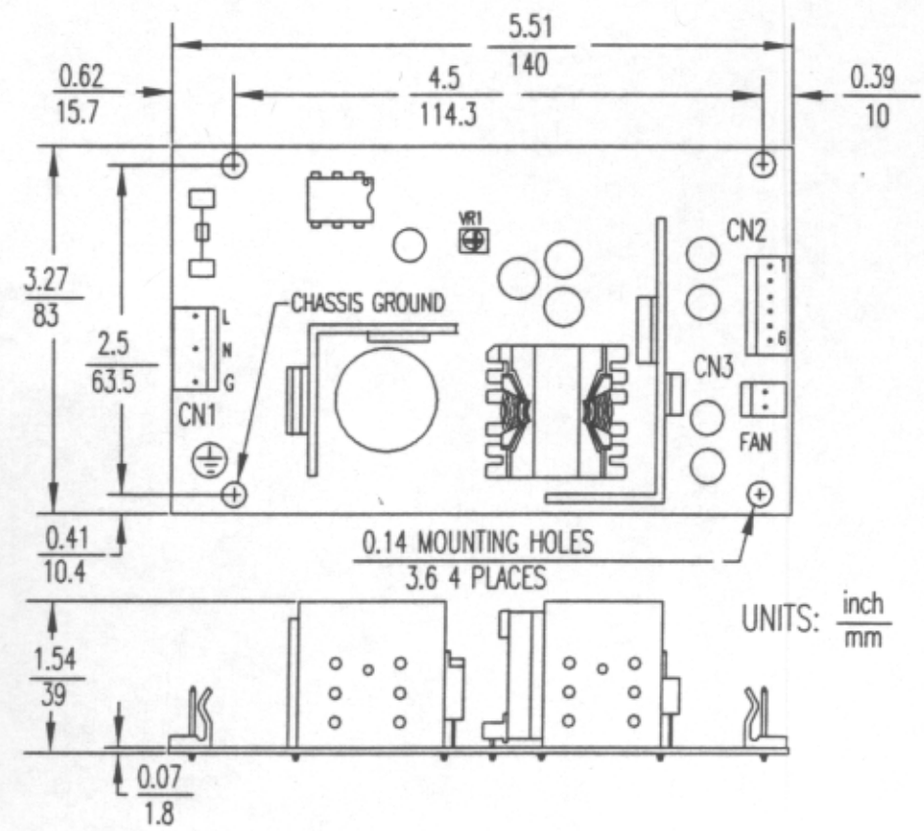

CONNECTOR	CN1
FUNCTION	AC INPUT
PIN 1	F.G.
PIN 2	N/C
PIN 3	NEUTRAL
PIN 4	N/C
PIN 5	LINE
PIN 6	
MOLEX (or equiv.)	09-65-205
MATING	09-50-105

For All Connectors: PIN 1 defined as fa (opposite side of lo

FUSING: 2A/250V Slow Blow

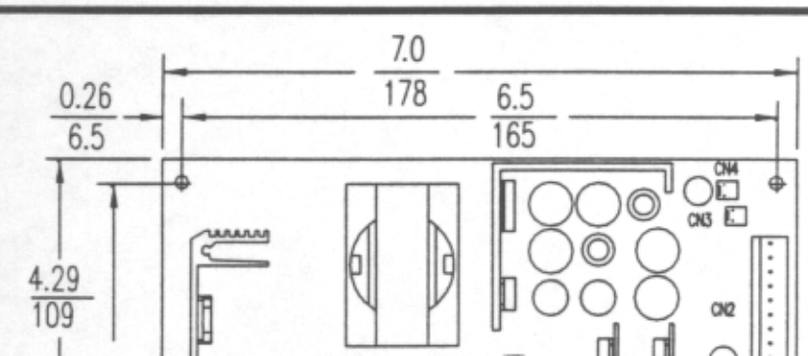

CN1	Molex: 09-65-2058 (Mate: Molex 09-50-1051 (		
PIN 1	PIN 2	PIN 3	PIN 4
F.G.	N/C	NEUT	N/C

CN2

Dual Output - Model Selection Chart (cont.

See UFC Series on page 2 for additional 50W Dual Output model.

OUTLINE: . . . . . 3.0" x 5.0" x H (see below) / 76.2 x 127.0 x H (see below)
MOUNTING: . . . . . 2.55" x 4.55" / 64.8 x 115.6 mm

See page

PWR / PK (1)	MODEL	VOLTAGE	MIN. A (2)	FULL (3)	P
20W / 30W	UPS20-6002 H = 1.14" / 29 mm Pg. 13	+5.0V +12.0V	0.2A 0.1A	2.5A 1.58A	
40W / 60W	UPS40-3002 H = 1.14" / 29 mm Pg. 13	+5.0V +12.0V	0.20A 0.10A	3.5A 3.0A	
40W / 60W	UPS40-2002 H = 1.1" / 28 mm Pg. 15	5.0V 12.0V	0.2A 0.1A	3.0A 2.0A	
50W / 70W	UPS50-2002 H = 1.8" / 46 mm Pg. 15	5.0V 12.0V	0.2A 0.1A	3.0A 3.0A	
50W / 70W	UPS51-2002 H = 1.2" / 30.5 mm Pg. 15	5.0V 12.0V	0.2A 0.1A	4.0A 3.0A	
50W / 70W	UPS50-200T H =1.8" / 46 mm Pg. 15	5.0V 12.0V	0.2A 0.1A	3.0A 3.0A	
70W / 105W	UPS70-3002 H =1.7" / 43 mm Pg. 16	5.0V 12.0V	0.5A 0.1A	6.0A 5.0A	

OUTLINE: . . . . . 3.27" x 5.51" x 1.54" / 83 x 140 x 39 mm
MOUNTING: . . . . . 2.5" x 4.5" / 63.5 x 114.3 mm

PWR / PK (1)	MODEL	VOLTAGE	MIN. A (2)	FULL (3)	P
65W / 90W	UPS65-1002-S	5.0V 12.0V	0.5A 0.1A	3.5A 4.0A	
65W / 90W	UPS65-1002-A	5.0V 12.0V	0.5A 0.1A	6.0A 2.5A	

OUTLINE: . . . . . 3.5" x 6.0" x H / 89 x 152.5 x H mm
MOUNTING: . . . . . 3.15" x 4.80" / 80 x 122 mm

PWR / PK (1)	MODEL	VOLTAGE	MIN. A (2)	FULL (3)	P
65W / 90W	UPS65-1002 H = 1.54" / 39 mm	5.0V 12.0V	0.5A 0.1A	3.5A 4.0A	
65W / 90W DUAL OUTPUT ADJ	UPS65-1002-M H = 1.54" / 39 mm	5.0V 12.0V	0.5A 0.1A	3.5A 4.0A	
85W / 120W	UPS85-1002 H = 1.87 / 47.5 mm	5.0V 12.0V	0.8A 0.5A	8.0A 6.7A	

OUTLINE: . . . . . 4.29" x 7.0" x 1.88" / 109 x 178 x 47.7 mm
MOUNTING: . . . . . 3.75" x 6.5" / 95.25 x 165.0 mm

PWR / PK (1)	MODEL	VOLTAGE	MIN. A (2)	FULL (3)	PE
85W - 110W / 125W PK	UPS110-1021	5.0V 12.0V	0A 0A	7.0A 5.6A	
85W - 110W / 125W PK	UPS110-102M DUAL OUTPUT ADJUST	5.0V 12.0V	0A 0A	7.0A 5.6A	